


# 1-DOOR CONTROLLER INSTALLATION INSTRUCTION (TS-WU-1DR)

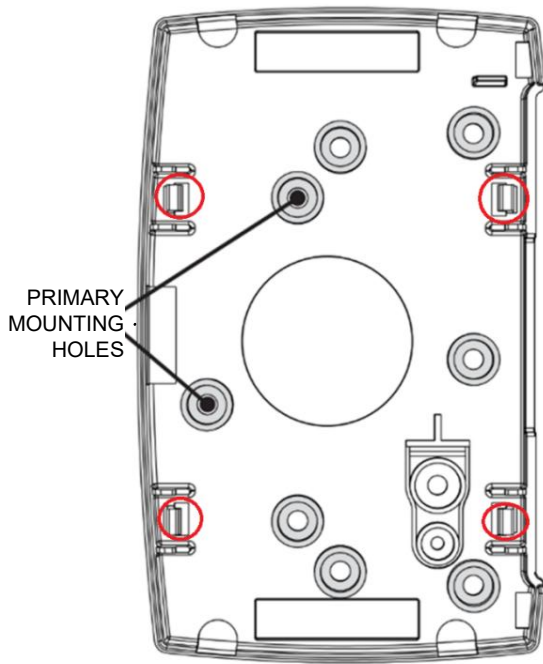



## 1. MOUNT BACK PLATE

- Remove front cover from controller
- Carefully remove the PCB controller board from the back plate by depressing the small tabs circled in red
- Mount the back plate (in the orientation shown) to the wall in the desired location using the necessary mounting holes

For more information visit: [TrueSecurePro.com](http://TrueSecurePro.com)

## 2. RE-INSTALL PCB CONTROL BOARD AND RUN WIRING

- Carefully reinstall the PCB controller board under the small tabs circled in red
- Use the indicated wiring openings for reader, lock mechanism and power supply wires

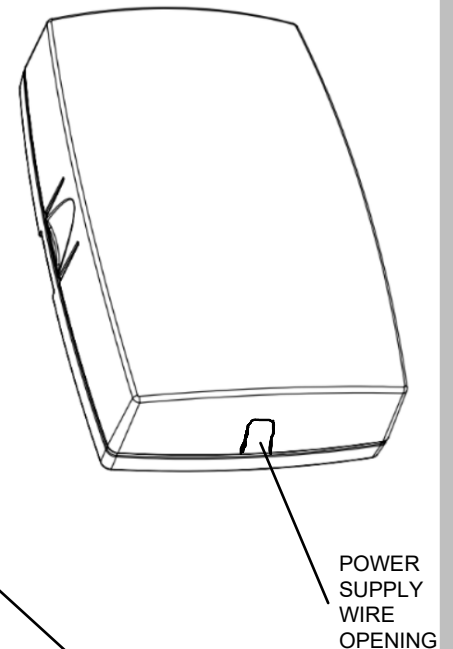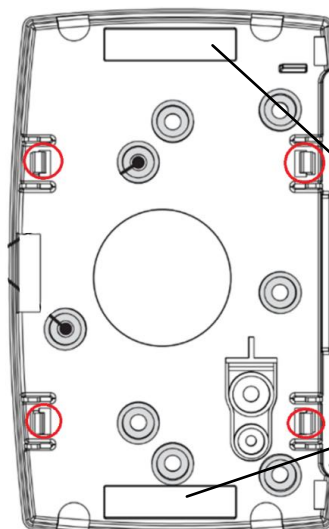


For more information visit: [TrueSecurePro.com](http://TrueSecurePro.com)

# 1-DOOR CONTROLLER INSTALLATION INSTRUCTION (TS-WU-1DR)



## 3. WIRE CARD READER


- Connect access reader wiring as shown in diagram

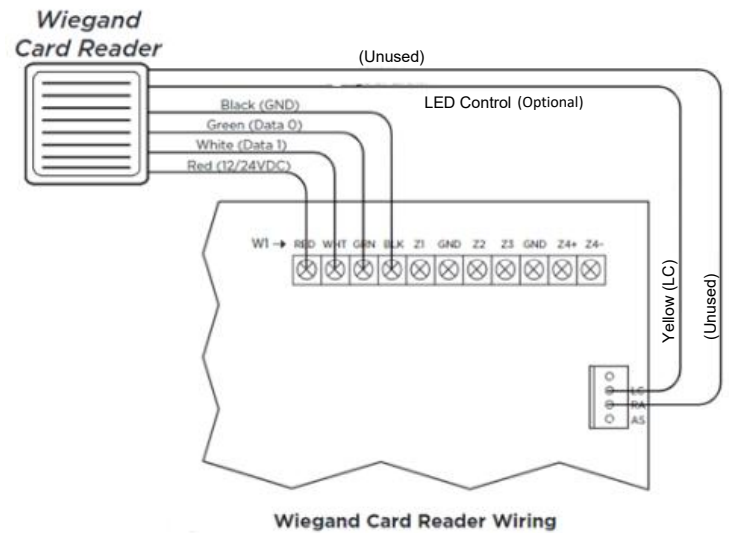


## 4. WIRE LOCK MECHANISM

- Wire lock mechanism to be controlled in normally open or normally closed configuration as needed (including supplied suppressor)
- Optional – If wiring Request To Exit switch connect to terminals Z2 and Ground (Normally Closed switch required)

Typical Door Strike Wiring

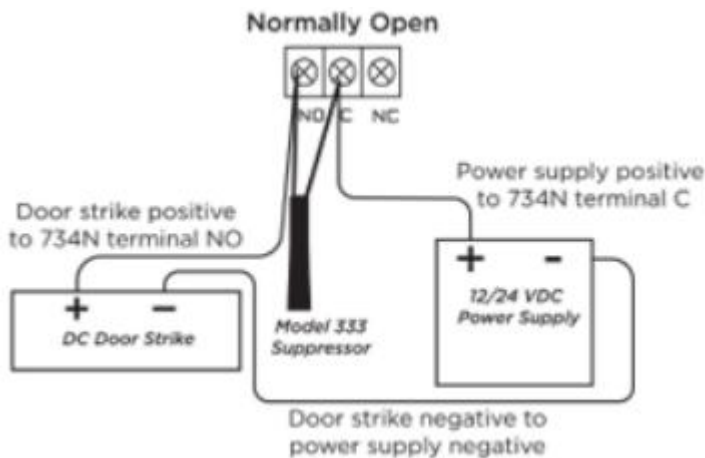

Typical Magnetic Lock Wiring

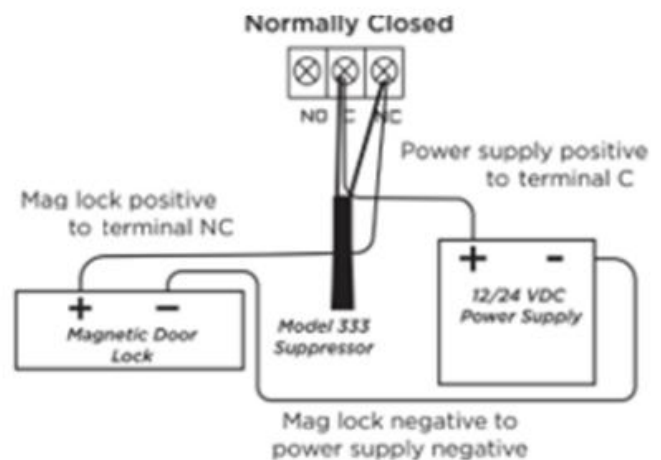

## 5. POWER UP AND CONNECT TO WIFI

- Wire 12V DC power supply to DC input terminals
- Supply power to turn on the controller and reader
- With the TrueSecure ADMIN app on a mobile device, connect and configure the 1-Door Controller to your Wi-Fi

