

WK Series Grade 2 Lever Locks

Smart & Versatile

Seamless Keyless Entry

Choose pin code, card or fob access credentials.

Versatile

Works with a variety of latch types, exit devices, and door backsets.

Commercial Features

Durable, grade 2 to meet commercial door latches & custom keying needs.

Affordable, Simple Installation

Designed with easy installation in mind. Direct to Wi-Fi simplifies installation & reduces costs.

Manage it Remotely

Connect to cloud-based access software to manage your facility from anywhere.

Architectural Finishes



626 (US26D)
Satin Chromium



622 (US19)
Flat Black

Cylinders



Conventional, Restricted,
High Security, SFIC



Tubular
2.375 in. (60mm) and
2.75 in. (70mm) latch

Mortise



**Exit Bar
Control**



Key Features

Versatile

- Works with a variety of latch types, exit devices, and door backsets
- Interior or Exterior Usage
- Choose Pin, Fob or Card
- Key override

Commercial Features

- Custom Keying options, Keyed-Alike, Restricted, High Security
- Grade 2 ANSI/BHMA tested

Remote Management & Notifications

- With access software

Uninterrupted Door-Access

- Stores programming in case of power outage or offline network



Pin
Codes



Remote Lock/
Unlock Via App



Smartcard/
Fob



Key
Override

WK G2 Locks Specifications




Environment	For normal internal and external use
Exterior Dimensions	7.625 (H) x 2.75 (W) x 2.75 (D) in.
Interior Dimensions	7.625 (H) x 2.75 (W) x 2.75 (D) in.
Weight	7.90 lbs.
Backset	2.375 in. (60 mm) and 2.75 in. (70 mm) supplied
Locking Devices	Available with cylindrical, exit trim, and mortise options
Mortise Door Prep	Standard ANSI 115.1 Mortise prep (86 cutout), modified with added through-bolt holes
Tubular Latch Door Prep	Standard ANSI A115.2 (160 and 161 cutouts)
Strike	2.75 in. (for 1.375 in. door) and 4.875 in. (for 1.75 in. door) supplied
Construction	Zinc Alloy, suitable for indoor & outdoor use
Door Thickness	1.375 – 2.375 in. (35 mm – 60 mm)
Door Handing	Non-handed, field reversible
Batteries	4 AA (Not Included)
Certifications	ANSI/BHMA A156.25-2018, Grade 2, ANSI/BHMA A156.2-2017
Warranty	1 year
Finishes	Satin Chrome, Matte Black
Cylinder and Keys	Removable 6-pin Schlage C core standard (SC4 key), SFIC core available

Ready to Ship

ITEM#	DESCRIPTION	ITEM#	DESCRIPTION
TS-WKG2-MKB-622	Grade 2 Lever Black Finish	TS-WKEX-MKB-622	Grade 2 Exit Trim Black Finish
TS-WKG2-MKB-626	Grade 2 Lever Silver Finish	TS-WKEX-MKB-626	Grade 2 Exit Trim Silver Finish
TS-WKM1	Mortise Latch 116 Common Entry		

How to Order

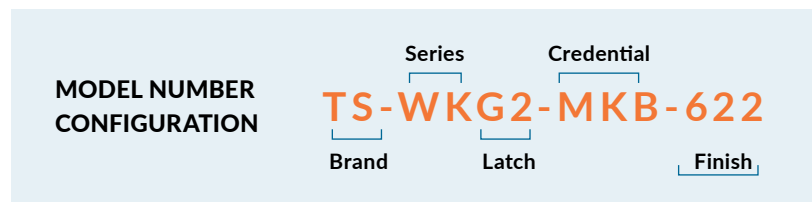

	CODE
Brand	TS = TruSecure
Series	WK
Latch	G2 = Grade 2 Lever EX = Exit Trim M1 = Mortise 116
Credential	M = Mifare K = Keypad B = BLE in App
Lever	PHL = Philadelphia (default)
Finish	622 = Flat Black (US19) 626 = Satin Chromium (US26D)
Cylinder	KMS 6pin = Schlage 6-pin/key
Keyway	C = Schlage 'C' Keyway
Keying	KD = Keyed Different (default)

SPECIAL ORDER	CODE
Latch	M3 = Mortise 136w DB
Cylinder	SFIC = Small format IC Core Restricted = Restricted Formats UL437 = High Security Cores L = Less Cylinder SFL = SFIC Less Core
Keyway	5+ Keyways
Keying	KA = Keyed Alike KE = Keyed to Existing KO = Zero Blttd MK = Master Key